


## SUPERLOK STANDING SEAM ROOF

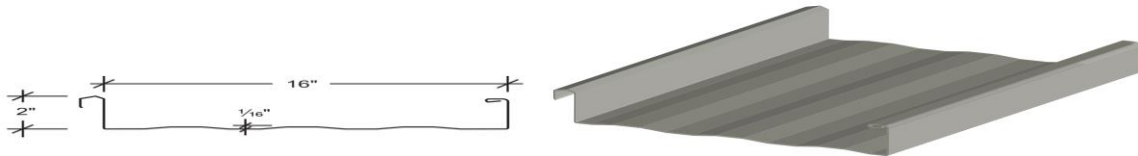

SuperLok® is available in both 12-inch and 16-inch widths. SuperLok® has been designed to withstand the most rigorous weather conditions. SuperLok® can be installed directly over purlins or bar joists. SuperLok® does not require a solid substructure for support.

## Features

---

- Coverage Width - 12", 16"
- Minimum Slope - 1/2:12
- Panel Attachment - Concealed Fastening System; Low, High (fixed or floating), Utility (no insulation clearance)
- Gauge - 24 (standard); 22 (optional)
- Finishes - Striated (standard); Embossed Striated (optional)
- Coatings - Galvalume Plus®, Signature® 200, Signature® 300